





TRANSDUCER

Fully compatible for steel and aluminum vessels.

NRG-T-3	IP68	1.00kg
DATASHEET NO.	RATING	WEIGHT

Sonihull Transducer

Sonihull is one of the only systems suitable for metal/aluminum vessels, due to its fully encapsulated waterproof IP68 transducer.




Designed for the harsh marine environments effective on a wide range of hulls including Steel, Aluminium, GRP, Carbon / Kevlar. HDPE.

Suitable for a wide range of applications including Hulls, sea chests, box coolers, jet drives.

Operating temperature : -20 to +115 degrees C. Cable length: Effective coverage:

6.5 Metres. Extension cables available. 5 metres radius.

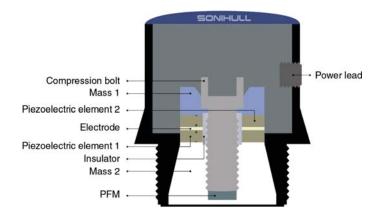



Lamers System Care Loopkantstraat 25 5405 AC Uden The Netherlands +31 413 275 647 info@LSCare.nl ww.LSCare.nl

SONIHULL

DATASHEET

Copyright © The information contained within these data sheets remains the property of NRG Marine Ltd. and is not to be altered or reproduced without written permission. NRG Marine reserves the right to change any specification without giving prior notice.